

Electro-Pneumatic Positioner YT-1000R

Model	Acting Type	Explosion Protection	Lever Type	Orifice Type	Conduit - Air Connection	Operating Temp*2	Option1	Option2*2
YT-1000R	S Single	N Non-Explosion	1 M6×34L	1 ϕ 1	G1/2 - PT1/4	S -20°C ~ 60°C	0 NONE (St'd)	0 NONE
	D Double	M ATEX, IECEx, TS, KCs	2 M6×63L	2 ϕ 2	G1/2 - NPT1/4	H -20°C ~ 120°C	1 Dome Cover	1 + SPTM(Internal)
		A CSA, FM	3 M8×34L	3 None	G1/2 - G1/4	L -40°C ~ 70°C		2 + SPTM(External)
		C KCs, NEPSI	4 M8×63L		M20 - NPT1/4 *1			3 + L/S (Internal)
		I KCs	5 NAMUR		NPT1/2 - NPT1/4			4 + L/S (External)
		X TIIS						5 + SPTM + L/S (Internal)
							6 + SPTM + L/S (External)	

*1 M20 adapter is attached to conduit entry

*2 With high-low temp and/or internal external SPTM, L/S option, positioner must be non-explosion type.



YT-1000R



YT-1000R+SPTM(int)



YT-1000R+SPTM+L/S(int)



YT-1000R+DOME



YT-1000R+L/S(ext)
YT-1000R+SPTM+L/S(ext)




YT-1000R+SPTM(ext)



Item · Type	Single	Double
Input Signal	4-20mA DC	
Impedance	250 ± 15 Ω	
Supply Pressure	0.14~0.7MPa(1.4~7 bar)	
Stroke	0 ~ 90°	
Air Connection	PT(NPT,G)1/4	
Gauge Connection	PT(NPT) 1/8	
Conduit	G(PF,NPT)1/2, M20	
Explosion Protection Type	ATEX (II 2 G)Ex dmb IIB T5 IECEX (II 2 G)Ex md IIB T5 KCs Ex dmb IIB T5/Ex d IIC T5 IP66/Ex ia IIB T6 Gb TS Ex db mb IIB T5 Gb X CSA (Class I, Zone 1)Ex dmb IIB T5 FM XP-S/1,CD/T5 Ta=60°C; DIP/II,III/1/EF/G/T5 Ta=60°C ;Type 4X NEPSI Ex dmb IIC T6 Gb TIIS Ex dmb IIB T5	
Ingress Protection	IP66	
Operating Temp	Operating	-20°C~70°C(-4~158°F)
	Explosion	-20°C~60°C(-4~140°F)
Linearity	± 1% F.S.	± 2% F.S.
Hysteresis	± 1% F.S.	
Sensitivity	± 0.2% F.S.	± 0.5% F.S.
Repeatability	± 0.5% F.S.	
Air Consumption	2.5LPM (sup=0.14MPa)	
Flow Capacity	80LPM (sup=0.14MPa)	
Material	Aluminum Diecasting	
Weight	2.8kg (6.2 lb)	

* For additional **SPTM, L/S specification** refer to p. 25, 27(Internal) and 26, 28 (External).

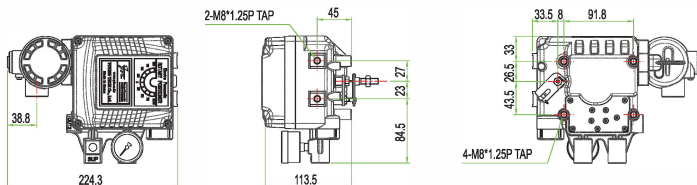

The Electro-Pneumatic Positioner YT-1000R is used for operation of pneumatic rotary valve actuators by means of electrical controller or control system with an analog output signal of DC 4 to 20mA or split ranges. (refer to YT-1000L, page 13)