

J3CS Smart Electric Actuator Function: POWER OPEN - POWER CLOSE , STAYS PUT ON POWER FAILURE



Type: E1103ES

J3CS Electric actuator direct mounted



Type: E1113ES

J3CS Electric actuator fitted via kit

Main J3CS Smart On-Off electric actuator features:

- Power On LED light
- LED light for continual visual actuator status feedback.
- Fully weatherproof smart industrial actuator.
- Multi-voltage 24-240V capable actuator with auto sensing.
- All external electrical connections, no need to remove cover .
- Selectable manual override facility.
- Thermostatic anti-condensation heater.
- Electronic torque limiter.
- End of travel switches for remote open/ closed indication.
- CE Marked
- EU manufactured by J+J.

Applications:

Water, oil, air and most non-corrosive media, subject to compatibility with wetted parts in contact with media. Not for use on potable water & NOT recommended for use on steam.

Valve actuators sized on a maximum differential pressure of 10 bar wet service, operated at least once per day. If the intended duty differs from these parameters, or is dry (air or gas), please call to check actuator sizing as a larger output valve actuator may be required.

Maximum working temperature of a direct mounted assembly is +70C. For higher working temperatures , consider models that have a mounting kit or TSM stem extension between the valve and the smart electric valve actuator which uses air cooling to dissipate the rising heat from the ball valve away from the actuator. Should the J3CS smart actuator see more than +70C it will malfunction.

Specifications:

Actuator housing	UV Protected Polyamide
Supply voltage range	24-240V AC or DC
IP Rating	IP67
Actuator temp limits	-20 to +70°C
Assembly temp limits	E1103ES +70°C
	E1113ES +95°C
Valve body	Nickel plated brass
Valve ball	Chrome plated brass
Valve seats	PTFE
Valve Pressure rating	UTI 2" 40 bar at ambient temp
Valve temp limits	-20 to +95°C
Size range	1/2" to 2"

Ball valve information:

Full bore 2 piece construction, providing full unrestricted flow and a very low pressure drop across the valve. Designed for automation with integrally cast ISO5211 actuator mounting platform. Turning the ball through 90° fully opens the valve, turning back through 90° fully closes the valve and isolates the flow. End connections are threaded BSP female.

Typical Kv Values

Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
Kv	16.3	29.5	43	89	230	265	540	873

Kv = m³ per hour with a 1 bar pressure drop across the valve

CV = US gallons per hour with a 1psi pressure drop across the valve

Cv = Kv / 0.86

J3CS ON OFF ELECTRIC ACTUATOR

Power open, power close, stays put on loss of external power.

How this electric 1/4 turn valve works (on-off):

Electrically operated valves are driven by a motor and gearbox. On receipt of a continuous voltage signal the motor runs and, via a gearbox in the J+J smart electric actuator, rotates the valve stem. The motor stops at the desired position (usually 0° or 90°) by internal cams striking micro-switches. The smart valve actuator remains in this position, with the voltage still applied continuously, until switched and a continuous voltage reversing signal is applied, which runs the motor in the opposite direction, reversing the rotation until separate set of internal cams strike separate set of micro-switches.

Options:

It is possible to change the J3CS actuator's function by installing user friendly pug and play function conversion kits. These will provide the following alternative functions:

Failsafe J3CS Actuator

J3CS fails to pre-set position using our BSR (Battery 'Spring Return' system which creates an alternate power supply should the external power fail.

Modulating J3CS Actuator

Movement of the J3CS actuator is proportional to an input control signal, typically 4-20mA or 0-10V, by installing our DPS (Digital Positioning System) user friendly plug and play kit. There are options for how the J3CS modulating reacts to loss of the control signal, but it will stay put on loss of external power.

Configuration options:

- 1) Closes on loss of control signal
- 2) Opens on loss of control signal
- 3) Stays put on loss of control signal

Failsafe Modulating J3CS Actuator


Failsafe modulating by installing the J+J BSR (Battery 'Spring Return') plug and play kit, operates functionally as a modulating electric actuator as described above, but will fail as per the DPS setting on loss of external power, as follows:

Configuration options:

- 1) Closes on loss of control signal, or on loss of external power
- 2) Opens on loss of control signal, or on loss of external power
- 3) Stays put on loss of control signal

Electrical Connection - Wiring of DIN Plugs

J3CS ON-OFF & FAILSAFE WIRING (Same connection for either)

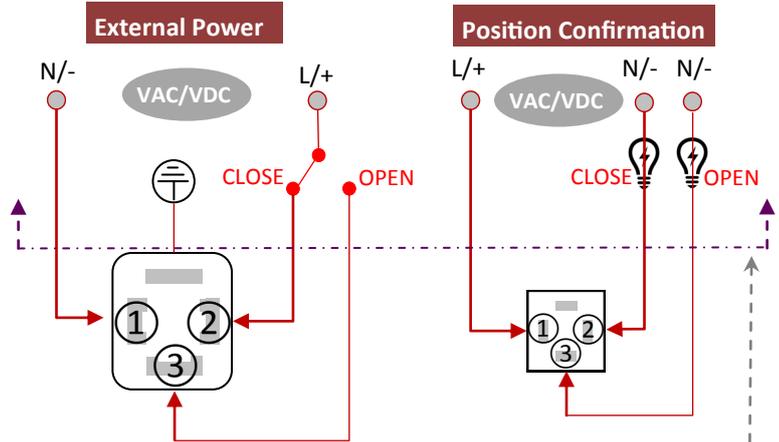

Note: Above line above is customer supplied.

In J+J electric actuators all electrical connections are made externally using the external DIN plugs supplied with the actuator. There is no need to remove the valve actuator's cover to connect electrically. There are no terminals internally to connect to.

Optional Plug & Play Function Conversion Kits



DPS Modulating plug & play kit




BSR Failsafe plug & play kit

Installing J+J Plug & Play function conversion kits

Failsafe and/or modulating function is quick and easy to achieve in the J3CS smart electric actuator by the fitting of the user friendly failsafe and/or modulating plug & play function conversion kits to the standard on-off J3CS smart valve actuator. When actuated valves are ordered with failsafe, modulating or failsafe modulating function, J+J install and test the plug and play function conversion kits. They can however be easily retro-fitted to J3CS smart electric actuators should the on-off function requirement (supplied as standard function), change.


Type: **E1103ES** Actuator direct mounted to valve

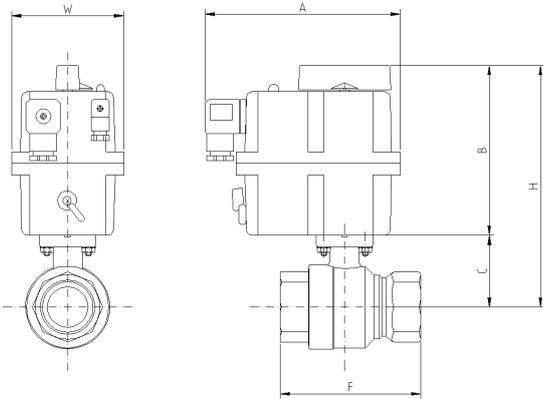

Typical Dimensions:

E1103ES Dimensions remain unchanged for all versions						
- On-off, failsafe, modulating and failsafe modulating						
	Model	A	F	H	W	Kilos
≤1/2"	20	177	65	178	110	1.9
3/4"	20	177	75	181	110	1.9
1"	20	177	86	185	110	2.2
1 1/4"	20	177	95	190	110	2.6
1 1/2"	20	177	101	206	110	3.2
2"	20	177	121	213	110	4.2
2 1/2"	35	177	165	220	110	5.8
3"	35	177	188	271	110	7.9

Type: **E1113ES** Actuator fitted to valve via a bracket and drive adapt-

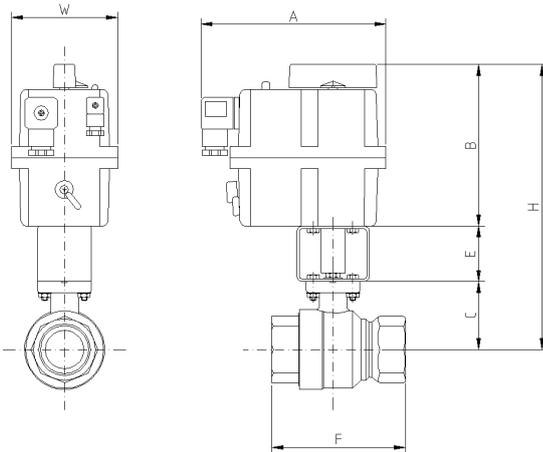

E1113ES Dimensions remain unchanged for all versions							
- on-off, failsafe, modulating & failsafe modulating							
	Model	A	E	F	H	W	Kilos
≤1/2"	20	177	50	65	228	110	2.1
3/4"	20	177	50	75	231	110	2.1
1"	20	177	50	86	235	110	2.4
1 1/4"	20	177	50	95	240	110	2.8
1 1/2"	20	177	50	101	256	110	3.4
2"	20	177	50	121	263	110	4.4
2 1/2"	35	177	50	165	270	110	6.0
3"	35	177	50	188	321	110	8.1

Type: **E1123ES** Actuator fitted to valve via a tubular stem extension

E1123ES Dimensions remain unchanged for all versions							
- on-off, failsafe, modulating & failsafe modulating							
	Model	A	E	F	H	W	Kilos
≤1/2"	20	177		65		110	
3/4"	20	177		75		110	
1"	20	177		86		110	
1 1/4"	20	177		95		110	
1 1/2"	20	177		101		110	
2"	20	177		121		110	
2 1/2"	35	177		165		110	
3"	35	177		188		110	

Call for details